

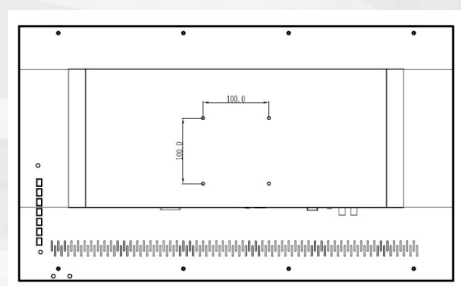


- Suitable for every Video Surveillance and Security application: displays HDMI, VGA, BNC analog inputs
- Fully tested, approved and licensed by the HDMI Forum to bear the official HDMI logo
- Support HDMI2.0
- Support 3D comb filter and 3D de-interlace, High quality image
- Auto-on when VGA or HDMI DVR/NVR video is detected
- Bright LED illuminated panel with ultra wide viewing angle.
- Built in stereo 8Ω x 5W speakers and audio amplifier
- The accessories include VGA line and power line
- CE, FCC certificates included. Entrada HDMI, VGA y BNC



Screen diagonal dimension	28"
Screen Size	648.9 x 369.3 mm
Pixel Pitch	0.16 x 0.16 mm
Screen Maximum Resolution	3840 x 2160
Supported input Resolutions	720x400, 640x480, 800x600, 1024x768, 1280x1024, 1080P, 4K
Refresh Rate(vertical Frequency)	60 Hz
Color Depth	1.073B
Brightness	300cd/m ²
Auto Adjust	Yes
Monitor Aspect Ratio	16:9
Display Aspect Ratio	OSD selectable 16:9 or 4:3
Contrast Ratio	1000:1
Response Time(ms)	5.5
View Angle H/V(degrees)	170°/160°
Port inputs	USB, DP, 2xHDMI, VGA, Audio, BNC
Port outputs	BNC
Speakers	8 Ω 5 W / channel

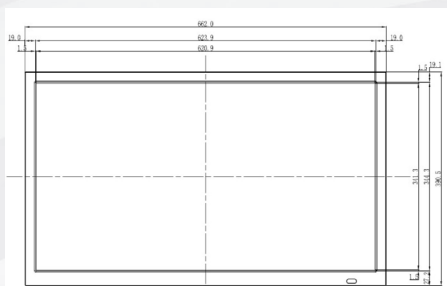

Filter type	3D Comb filter
De-interlace & Noise Reduction	3D De-interlace
OSD Languages	English, Spanish, German, Chinese, French, Italian
Monitor Body Dimensions	662 x 390, 5 x 50 mm
Case material	Metal
VESA Mounting Pattern	VESA 100 x 100
Base/Stand included	Base
Net weight	6.65 Kg
Power- Watts(on and standby)	40 W
Power input	100 - 240 V AC
Operating Temperature	0°C a +40°C
Storage Temperature	-20°C a +60°C
Operating Humidity	10 - 85%
Certifications	CE, FCC, HDMI Forum