

Evolution 05 & 12 Camera Series






Indoor / Outdoor / Concealed / Recessed / Stainless Steel










by Schneider Electric

Evolution 12			
Concealed	Indoor	Outdoor	Recessed
EVO-12NCD	EVO-12NID (white) EVO-12NJD (black)	EVO-12NMD (white) EVO-12NND (black)	EVO-12NRD (white) EVO-12NSD (black)
			
IP40 Ø76mm (3.0")	IP40 Ø179mm (7.1")	IK10 / IP66 Ø178mm (7.0")	UL2043 plenum Ø175mm (6.9")

Evolution 05			
Concealed	Indoor	Outdoor	Recessed
EVO-05NCD	EVO-05NID (white) EVO-05NJD (black)	EVO-05NMD (white) EVO-05NND (black)	EVO-05NRD (white) EVO-05NSD (black)
			
IP40 Ø76mm (3.0 in.)	IP40 Ø179mm (7.1")	IK10 / IP66 Ø178mm (7.0")	UL2043 plenum Ø175mm (6.9")

Evolution 5MP / 12MP Stainless Steel				
	Pendant Mount		Surface Mount	
	EVO-05PSK / EVO-12PSK		EVO-05SSK / EVO-12SSK	
				
	Package includes: Sunshield Pipe Thread Adapter Pendant Mount		Package includes: Wall Mounting Plate Conduit Gland Adapter	
316 Stainless Steel, IP69K, IK10				
Ø182mm (7.2")				

Mounting Accessories							
	Indoor Pendant Mount	Outdoor Pendant Mount	Outdoor Sunshield		Pole Mount Bracket	Wall Mount Bracket	Corner Bracket
White Black	OBE-01-IWA OBE-01-IBA	OBE-01-OWA OBE-01-OBA	OBE-02-OWA OBE-02-OBA	OBE-14-OWA OBE-14-OBA	OBE-03-OWA OBE-03-OBA	OBE-04-OWA OBE-04-OBA	OBE-05-OWA OBE-05-OBA
Product Image							
For	EVO-05 and EVO-12	EVO-05 and EVO-12	EVO-05 only	EVO-12 only	All EVO-05 and EVO-12 models (except Concealed and Recessed)		
Details	M32 female thread; supplied with M32 to 1½ NPT male thread adaptor	1½ NPT male thread	To be used with the outdoor pendant mount	To be used with the outdoor pendant mount	To be used with the appropriate indoor/outdoor pendant mount		


Evolution 05 Mini Camera Series

Indoor / Outdoor / Recessed



by Schneider Electric

Indoor		Outdoor		Recessed	
EVO-05LID	EVO-05LJD	EVO-05LMD	EVO-05LND	EVO-05LRD	EVO-05LSD

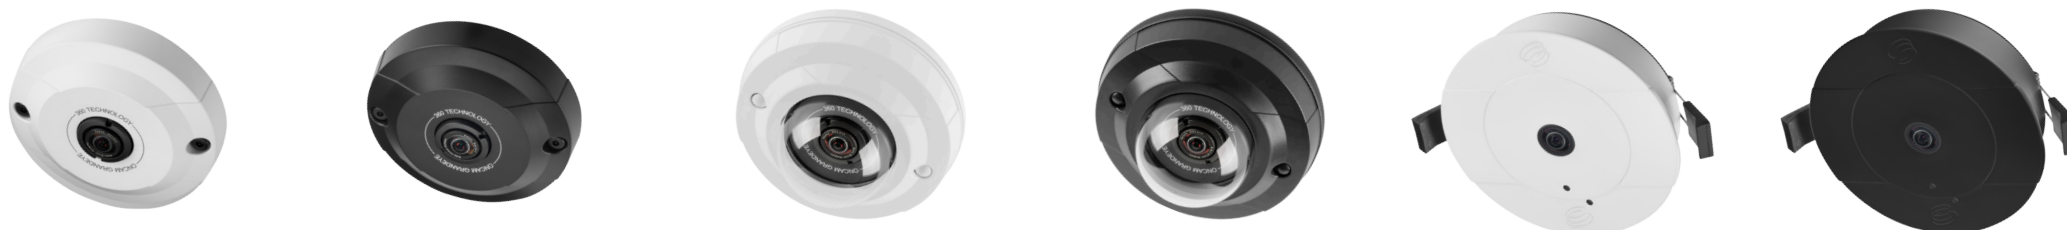

Indoor Features	Outdoor Features	Recessed Features
	EN50155 / EN45545 transport certification	Ultra low profile
IP40	IP66 / IK10	UL2043 plenum
RJ45 male flying lead	RJ45 female flying lead	RJ45 male flying lead
Ø108mm (4.25")	Ø118mm (4.65")	Ø120mm (4.72")

Mounting Accessories					
	Pendant Mount	Back Box	IK10 Dome Cover	Indoor Kit	Outdoor Kit
White Black	n/a OBE-13-IBA	OBE-16-OWA OBE-16-OBA	OBE-11-IWA OBE-11-IBA	OBE-17-OWA OBE-17-OBA	EVO-05-LWK EVO-05-LBK
Product Image					
For	Indoor	Indoor / Outdoor	Indoor	Indoor	Outdoor
Details	M32 female thread; supplied with M32 to 1½ NPT male thread adaptor	Available in Black or White	Available in Black or White	Kit includes: Pendant Mount + Back Box	Kit includes: Pendant Mount + Back Box + Sunshield